

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 23 TOWNSHIP 14 RANGE 4

DATE: -6-7-03 4-17-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Plug in steel box set

METHOD OF ESTABLISHMENT: County by Ind.



10-2-98

IN. S.P.C. E ZONE NAD '83

NAME: 14042307

N: 487270.3951(m)

E: 65916.6765(m)

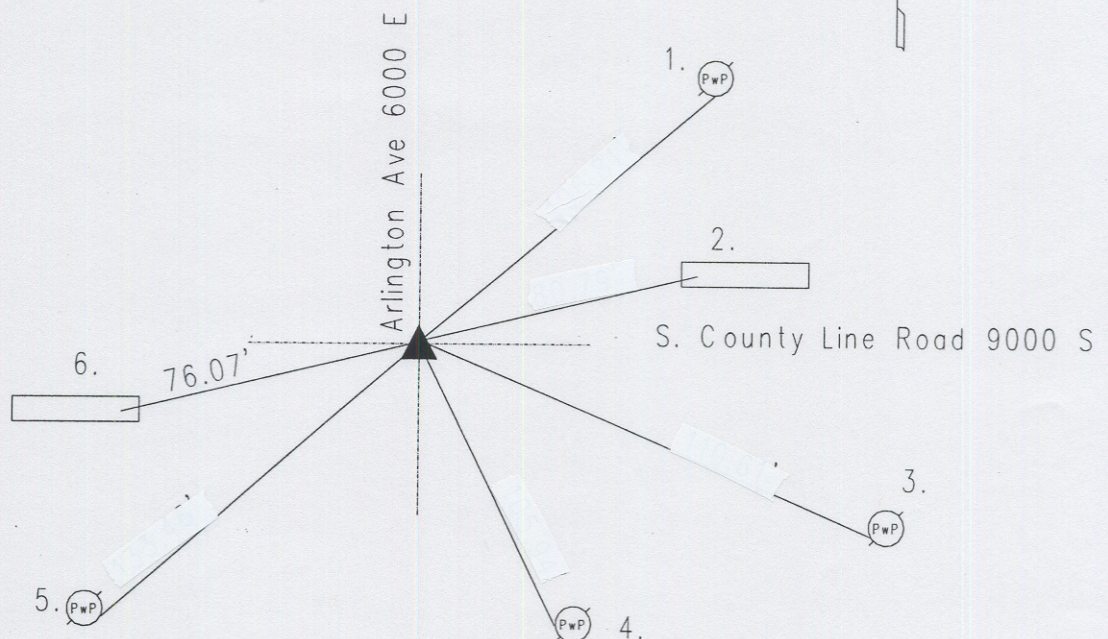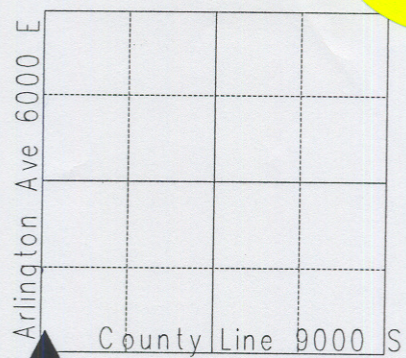

Original post set 1821 by Laughlin with witnesses: 18" beech N 29 W 20 links; 10" beech S 67 W 11 links per Marion County atlas pg. 9. Original survey field book # 2. 11-10-1849 Hosbrook set stone at location with green oak as witness per Franklin Township Legal Survey Book pg. 26. 10-10-63 & 4-2-70 report stone. 7-21-75 called bolt spike found. 8-16-84 excavated by MCSO stone found 4" down over another stone found 12" down. Harrison set. Re-tied 7-27-89. Re-tied 9-20-94. Found steel box 10-98 per Wilcoxon. Re-tied 6-7-03 by Wilcoxon
14042307

REF.	DISTANCE	DESCRIPTION
1.	106.72'	Mag nail w/brass washer S PwP#43-826 18"up
2.	80.73'	Cut 'x' in median
3.	110.68'	Mag nail w/brass washer SW PwP#1-826 24"up
4.	105.99'	Mag nail w/brass washer W PwP#63-826 30"up
5.	133.16'	Mag nail w/brass washer Johnson Co SE PwP#23-825 30"up
6.	76.07'	Cut 'x' in median